


Door panel type NORDIclean

PVC coated laminated mono/ multifilament fabric door panel

- 2 layers of touch polyester fabric
- 2 mm panel thickness, wight 2.4 kg/m²
- Operating temperature -30 to +70°C
- Coating of 0.1 mm PVC, smooth surface
- Colour Blue (RAL 5007) or Grey (RAL 7038)
- Min. bending radius 60 mm.
- Seamlessly welded optional vision panel available.
- Anti static. Tested according to EU norm prEN 1718.



- Smooth surface, dirt repellent, UV-resistant, approved for food plants.
- Seamlessly welded vision panel has no weak joints
- Anti-static
- Extremely durable - double layers of fabric
- Good for noise reduction, 25 dB at 2000 Hz
- Resistant to most chemicals including:
 - Ammonium, sodium, hydrate, phosphoric acid, tartaric acid, oil, detergents, calcium chloride, oxalic acid, chlorhydric acid, citic acid, sodium carbonate, acetic acid.*
- Can be cleaned by high pressure water
- Optional colours Yellow (RAL 1023), Red (RAL 3000) or Orange (RAL 2004)

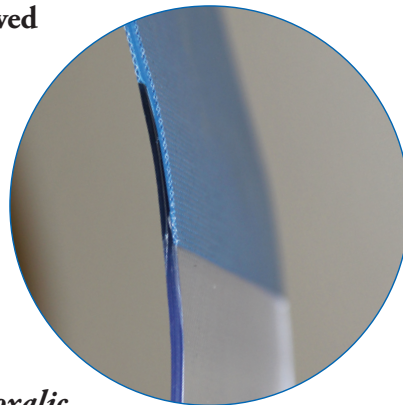

For further information, please contact NORDIC door.