


Door panel – NORDIclean

PVC-coated laminated mono/multifilament fabric door panel

- 2 layers of touch polyester fabric
- 2 mm panel thickness, wight 2,4 kg/m²
- Operating temperature -30 to +70°C
- Coating of 0,1 mm PVC, smooth surface
- Minimum bending radius 60 mm.
- Seamlessly welded optional vision panel available.
- Anti static:
Tested according to EU norm prEN 1718.



- Smooth surface, dirt repellent, UV-resistant, approved for food plants.
- Seamlessly welded vision panel has no weak joints.
- Anti-static.
- Extremely durable - double layers of fabric.
- Good for noise reduction, 25 dB at 2000 Hz.
- Resistant to most chemicals including:
Ammonium, sodium, hydrate, phosphoric acid, tartaric acid, oil, detergents, calcium chloride, oxalic acid, chlorhydric acid, citric acid, sodium carbonate, acetic acid.
- Can be cleaned by high pressure water.

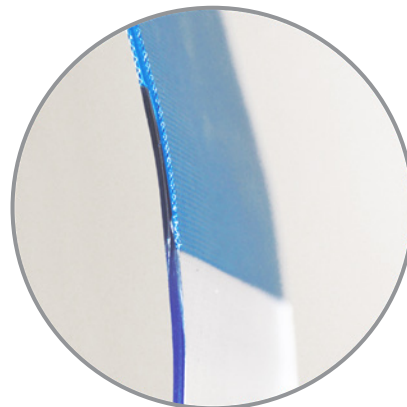

Standard colours: Blue (RAL 5007) or Grey (RAL 7038)

Optional colours: Yellow (RAL1023), Red (RAL3000), Orange (RAL 2004), Anthracite grey (RAL7016), White (RAL9010) and Green (RAL6005).

